

TEST REPORT

No.: AJFTS26000643R01_EN

Date: Feb 06,2026

Page 1 of 5

KUANGING INDUSTRIAL CO., LTD.

1-1203, NO.451 JIN CHENG RD., XIAOSHAN, HANGZHOU, ZHEJIANG

Sample Description : 3D WALLCOVERING FABRIC
Color : GRAY
Style/Item No. : LOOHM WC260123K955
Composition : 100% POLYESTER
Supplier : KUANGING INDUSTRIAL CO., LTD.
Country of Destination : USA
End Use Application : WALLCOVERING

The above sample(s) data and information was / were submitted and identified on behalf of the client. SGS is not responsible for the authenticity, integrity and results of the data and information and / or the validity of the conclusion arising therefrom. Results apply to the sample as received.

Sample Receiving Date : Jan 27,2026
Testing Period : Jan 27,2026 to Feb 04,2026
Test Required : ASTM E84-2024 Standard Test Method for Surface Burning Characteristics of Building Materials.
Test result(s) : See attached sheet

Signed for and on behalf of
SGS-CSTC Standards Technical Services Co., Ltd Anji Branch

Eva Zhang
Approved signatory



Scan to see the report
AJFTS26000643R01
Verification:
check.sgs.com.cn



SGS-CSTC Standards Technical Services Co., Ltd.
Anji Branch

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No. 301, Sunlight Road, 2 Block, Sunlight Industry Zone, Anji County, Zhejiang Province, China 313300 t (86-572) 5018825 f (86-572) 5018829 www.sgs.com.cn
中国·浙江·安吉县阳光工业园二区阳光大道301号 邮编: 313300 t (86-572) 5018825 f (86-572) 5018829 sgs.china@sgs.com

I. Test conducted

This test was conducted in accordance with ASTM E84-2024 Standard Test Method for Surface Burning Characteristics of Building Materials.

II. Introduction

The method, designated as ASTM E84-2024, Standard Method of Test for Surface Burning Characteristics of Building Materials, is designed to determine the relative surface burning characteristics of materials under specific test conditions. Results are expressed in terms of flame spread index (FSI) and smoke developed index (SDI).

The purpose of this test method is to determine the relative burning behavior of the material by observing the flame spread along the specimen. Flame spread and smoke developed index are reported. However, there is not necessarily a relationship between these two measurements.

III. Test procedure

The tunnel is preheated to 65.6°C(150°F), as measured by the floor-embedded thermocouple located 7.09m (23.25 ft) downstream of the burner ports, and allowed to cool to 40.6°C(105°F), as measured by the floor-embedded thermocouple located 3.96m (13 ft) from the burners. At this time the tunnel lid is raised and the test sample is placed along the ledges of the tunnel so as to form a continuous ceiling 7.32m (24 ft) long, 304.8mm (12 in) above the floor. The lid is then lowered into place.

Upon ignition of the gas burners, the flame spread distance is observed and recorded every 30 seconds. Flame spread distance versus time is plotted ignoring any flame front recessions. If the area under the curve (A) is less than or equal to 97.5 ft·min, FSI = 0.515·A; if greater, FSI = 4900/(195-A).

The test results for smoke shall be plotted and the area under the curve shall be divided by the area under the curve for heptane, multiplied by 100, and rounded to the nearest multiple of five to establish a numerical smoke-developed index (SDI).

IV. Conditioning

Prior to testing, the sample was conditioned, to a constant weight at a temperature of 23±2.8°C (73.4±5°F) and at a relative humidity of 50±5%.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Sample details

Sample description	Wallcovering Fabric
Color	Beige
Area density	587 g/m ²
Exposed face	Front surface

Mounting methods:

The 20-gage, 2-in. (51-mm) hexagonal galvanized steel netting should span the width of the tunnel, then the specimen shall be placed on the netting.

The specimens are consisted of 2 pieces of 580mm wide by 3045mm long and 1 piece of 580mm wide by 1290mm long, all sections jointed end-to-end.

The assembly size is 7380mm x 580mm.

Test results:

Flame Spread Index, FSI	Smoke-developed Index, SDI
10	400

Rating:

The National Fire Protection Association Life Safety Code 101, Chapter 10, Section 10.2.3 Interior Wall and Ceiling Finish Classification, has a means of classifying materials with respect to Flame Spread and Smoke Developed when tested in accordance with ASTM E84 or UL 723 Method of Test of Surface Burning Characteristics of Building Materials.

International Building Code, Chapter 8, Interior Finishes, Section 803 Wall and Ceiling Finishes, was classified in accordance with ASTM E 84 or UL 723. Such interior finish materials shall be grouped in the following classes in accordance with their flame spread and smoke-developed indexes.

NFPA 5000 Building Construction and Safety Code, Chapter 10.2.3.3 Interior Wall and Ceiling Finish Materials Tested in Accordance with ASTM E84 or UL 723.

The classifications are as follows:

Index	Class A	Class B	Class C
Flame Spread Index	0-25	26-75	76-200
Smoke-developed Index	0-450	0-450	0-450

Since the tested sample received a Flame Spread Index 10 and a Smoke-developed Index 400, it would **meet** the requirements of **Class A** interior Wall & Ceiling Finish Category.




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Graphical results:

Flame Spread Chart

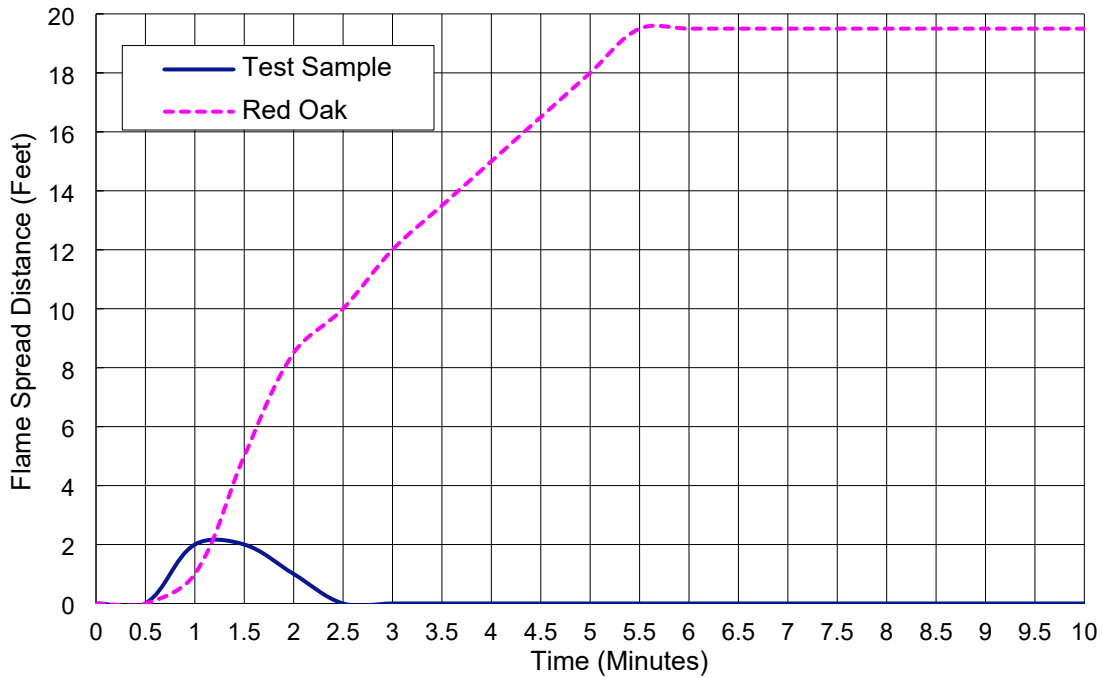

Smoke Developed Chart

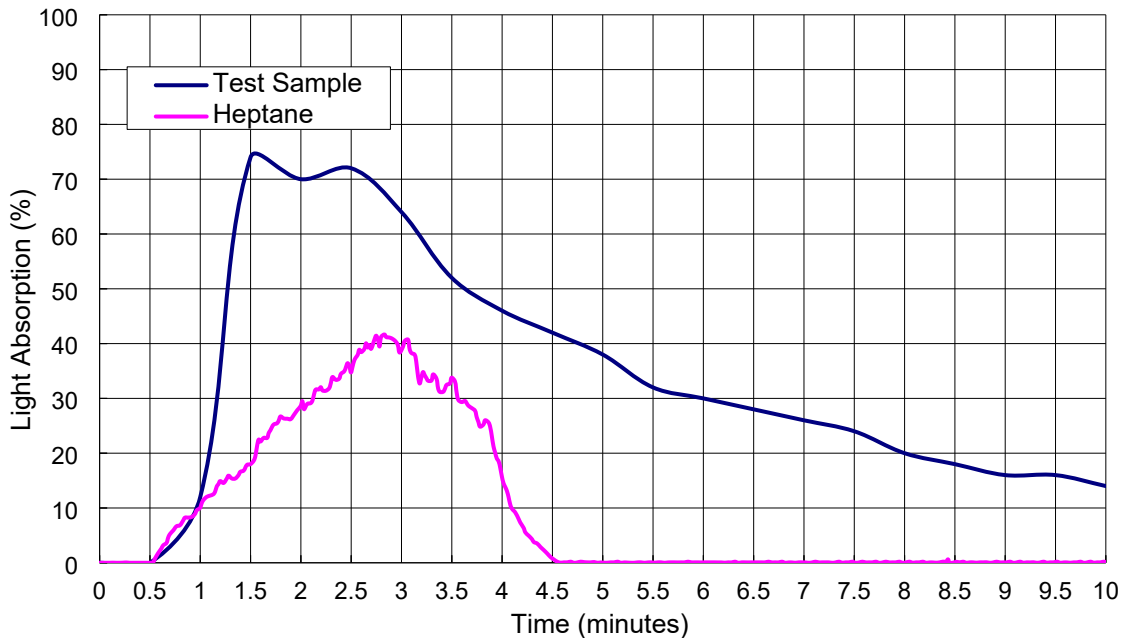

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No. 301, Sunlight Road, 2 Block, Sunlight Industry Zone, Anji County, Zhejiang Province, China 313300 t (86-572) 5018825 f (86-572) 5018829 www.sgs.com.cn
 中国·浙江·安吉县阳光工业园二区阳光大道301号 邮编: 313300 t (86-572) 5018825 f (86-572) 5018829 sgs.china@sgs.com



Observations:

Time to ignition (sec)	41
Time to Max. FS (sec)	56
Maximum FS (feet)	2
Observations	Flaming dripping; Floor burning

Statement: This declaration of conformity is only based on the result of this laboratory activity, the impact of the uncertainty of the results was not included.

Photo Appendix:



SGS authenticate the photo on original report only

End of Report



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No. 301, Sunlight Road, 2 Block, Sunlight Industry Zone, Anji County, Zhejiang Province, China 313300 t (86-572) 5018825 f (86-572) 5018829 www.sgs.com
 中国·浙江·安吉县阳光工业园二区阳光大道301号 邮编: 313300 t (86-572) 5018825 f (86-572) 5018829 sgs.china@sgs.com